



Reynaers CF68 Bi-Fold Threshold Guide



Double weather seal



Flush threshold




High performance



Low threshold

PERFORMANCE				
VARIANTS	Flush threshold	Low threshold	Double weather seal	High performance
U-VALUE TRIPLE-GLAZED ²	Down to 1.1 W/m ² K			
Uf VALUE (EN ISO 10077-2) ¹	Down to 1.8 W/m ² K			
SECURITY ³	Not applicable	RC2, PAS24 and Secured by Design		
AIR-TIGHTNESS (EN12207) ⁴	Not applicable	Class 4	Class 4	Class 4
WIND-RESISTANCE (EN12210; EN12211) ⁵	Not applicable	Class C1/B3	Class C2/B3	Class C2/B3
WATER-RESISTANCE (EN12208) ⁴	Not applicable	Class 5a (200Pa)	Class 7a (300Pa)	Class 9a (600 Pa)

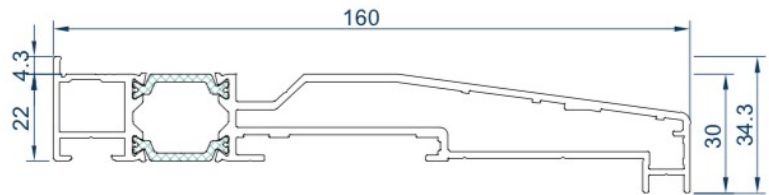


203.0048.xx

160mm Sill
(LENGTH 7M)

069.0059 & 069.0050 End Caps

N.B Flush threshold is not weather rated and only suitable for indoor use.

**Low Threshold
(Level 2)**




105.0934.xx

Level 2 Threshold
(LENGTH 7M)

Water Rating: 200Pa*

**Double Weather Seal
(Level 3)**

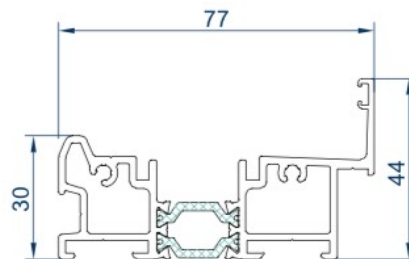

105.0945.xx

Level 3 Threshold
(LENGTH 7M)

Water Rating: 300Pa*

**High Performance
(Level 4)**

